

Main Memory

Fan Wu

Department of Computer Science and Engineering

Shanghai Jiao Tong University


Spring 2020

Background


- Program must be brought (from disk) into memory and placed within a process for it to be run
- Main memory and registers are only storage CPU can access directly
- Register access in one CPU clock cycle
- Main memory may take several cycles
- Memory unit only sees a stream of addresses + read requests, or address + data and write requests
- Protection of memory required to ensure correct operation

Base and Limit Registers

- A pair of **base** and **limit** registers define the physical address space

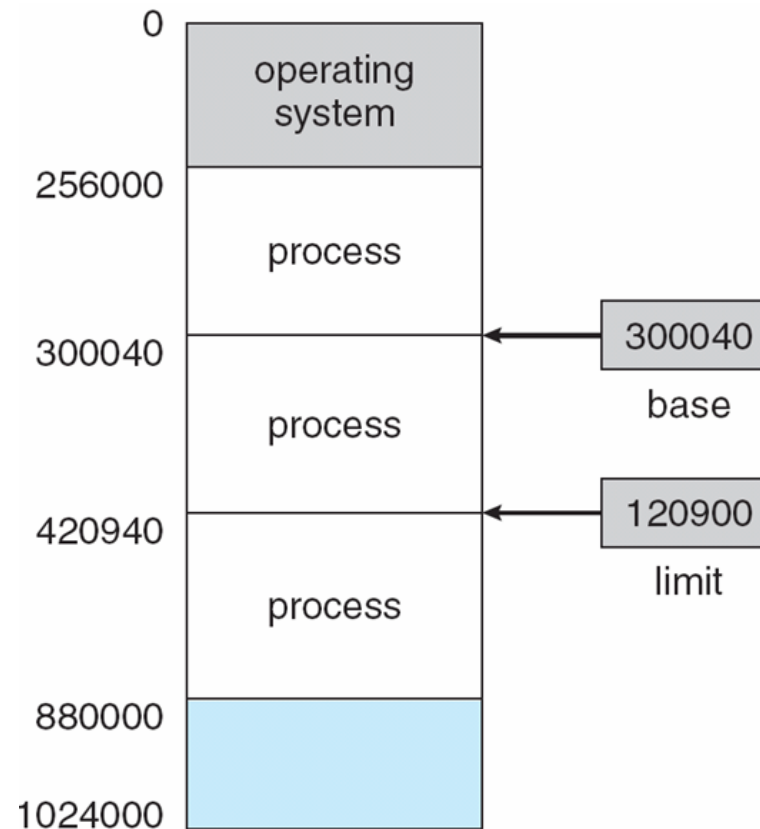

Hardware Address Protection

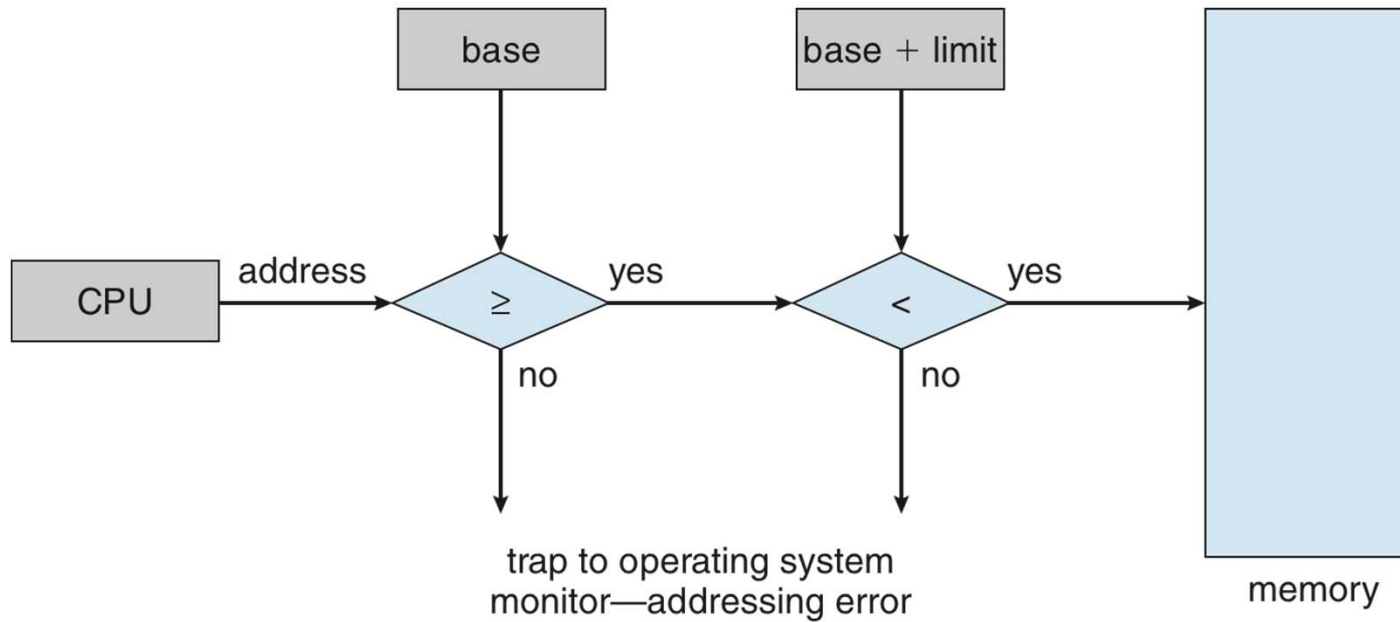


Logical vs. Physical Address Space

- The concept of a **logical address space** that is bound to a separate **physical address space** is central to proper memory management
 - **Logical address** – generated by the CPU; also referred to as **virtual address**
 - **Physical address** – address seen by the memory unit
- **Logical address space** is the set of all logical addresses generated by a program
- **Physical address space** is the set of all physical addresses generated by a program

Memory-Management Unit (MMU)

- Hardware device that at run time maps logical to physical address
- Many methods possible, covered in the rest of this chapter
- To start, consider a simple scheme where the value in the relocation register is added to every address generated by a user process at the time it is sent to memory
 - Base register now called **relocation register**
- The user program deals with *logical* addresses; it never sees the *real* physical addresses
 - Execution-time binding occurs when reference is made to location in memory
 - Logical address bound to physical addresses

Dynamic Relocation using a Relocation Register

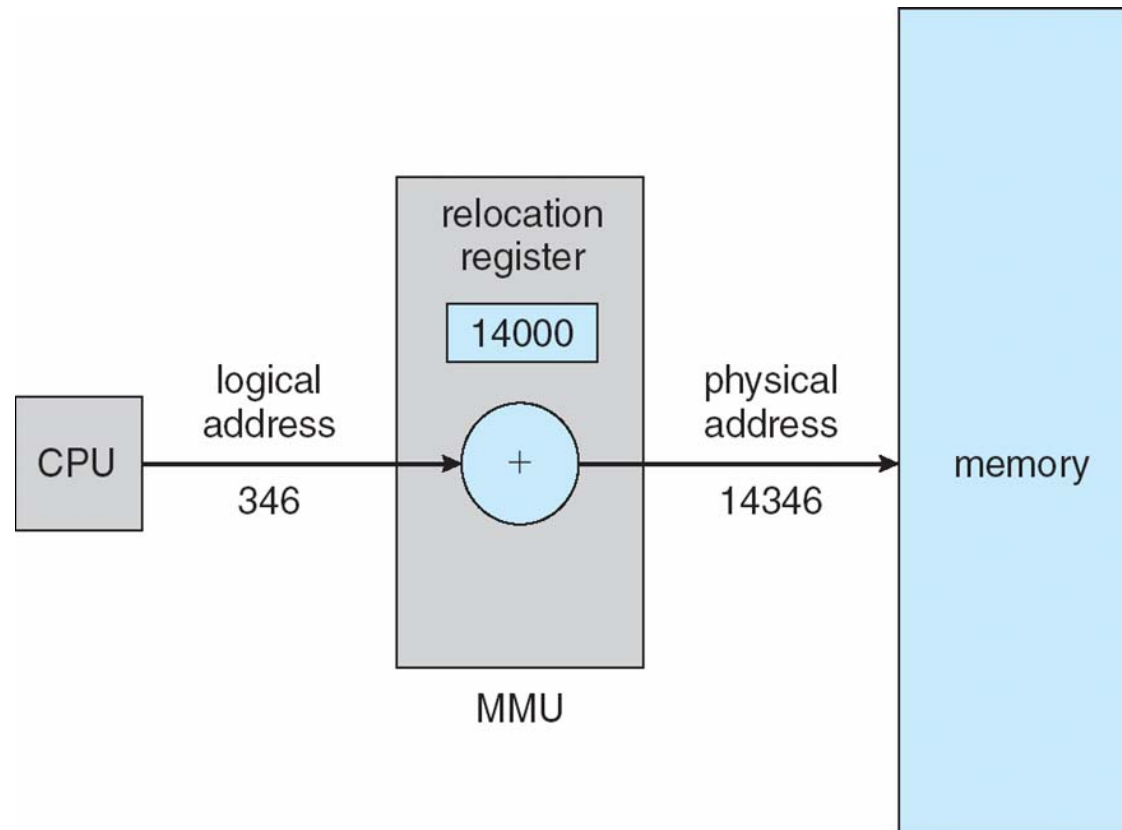


Memory Management


- Contiguous memory allocation
- Non-contiguous memory allocation
 - Paging

Contiguous Allocation

- Each process is contained in a single contiguous section of memory
- Main memory usually contains two partitions:
 - Resident operating system, held in low/high memory with interrupt vector
 - User processes then held in high/low memory
- Relocation registers used to protect user processes from each other, and from changing operating-system code and data
 - Base register contains value of smallest physical address
 - Limit register contains range of logical addresses – each logical address must be less than the limit register

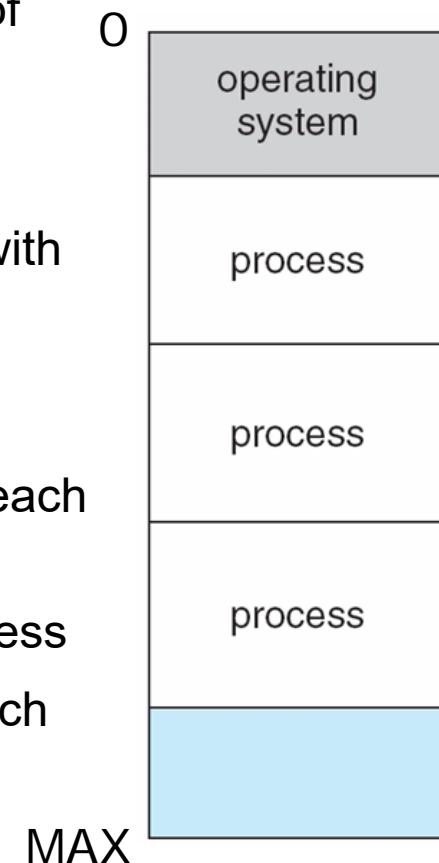


Hardware Support for Relocation and Limit Registers

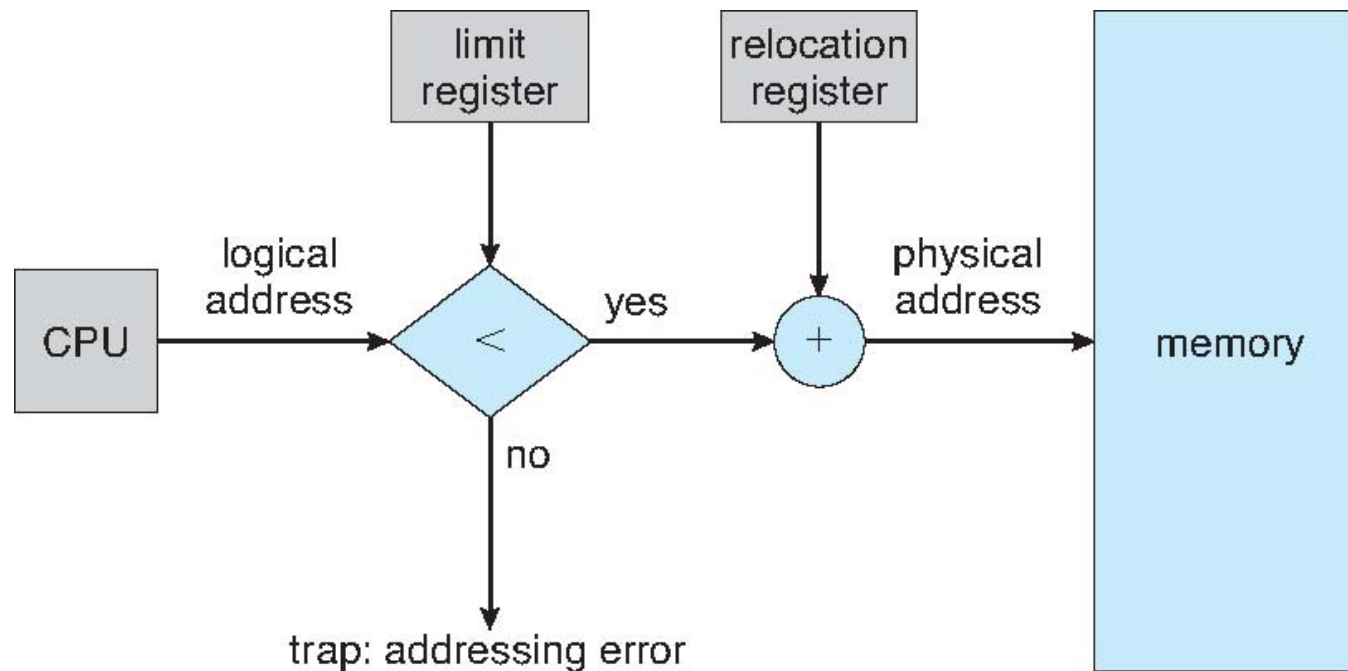

Contiguous Allocation (Cont.)

■ Multiple-partition allocation

- Degree of multiprogramming limited by number of partitions
- Hole – block of available memory; holes of various size are scattered throughout memory
- When a process arrives, it is allocated memory from a hole large enough to accommodate it
- Process exiting frees its partition, adjacent free partitions combined
- Operating system maintains information about:
a) allocated partitions b) free partitions (hole)

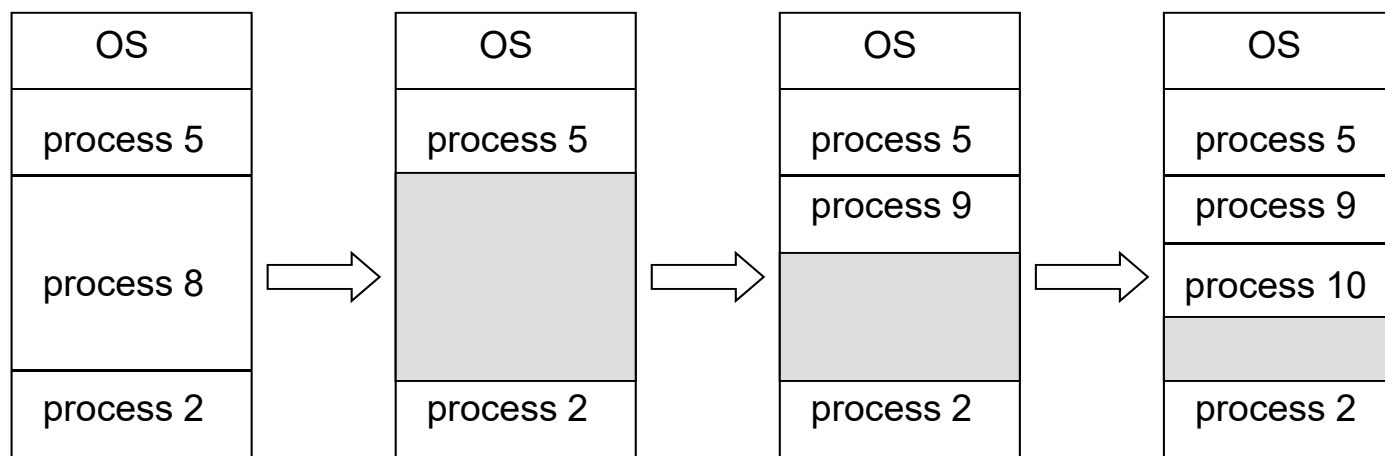

Dynamic Storage-Allocation Problem

How to satisfy a request of size n from a list of free holes?

- **First-fit:** Allocate the *first* hole that is big enough
- **Best-fit:** Allocate the *smallest* hole that is big enough; must search entire list, unless ordered by size
 - Produces the smallest leftover hole
- **Worst-fit:** Allocate the *largest* hole; must also search entire list
 - Produces the largest leftover hole

First-fit and best-fit better than worst-fit in terms of speed and storage utilization

Fragmentation

- **External Fragmentation** – total memory space exists to satisfy a request, but it is not contiguous
- **Internal Fragmentation** – allocated memory may be slightly larger than requested memory; this size difference is memory internal to a partition, but not being used
- First fit analysis reveals that given N blocks allocated, another $0.5 N$ blocks lost to fragmentation
 - 1/3 may be unusable -> **50-percent rule**


Fragmentation (Cont.)

- Reduce external fragmentation by **compaction**
 - Shuffle memory contents to place all free memory together in one large block
 - Compaction is possible *only* if relocation is dynamic, and is done at execution time
- Another solution to permit the logical address space of the processes to be **noncontiguous**
 - **paging**
 - **segmentation**

Paging


- Physical address space of a process can be noncontiguous; process is allocated physical memory whenever the latter is available
- Divide physical memory into fixed-sized blocks called **frames**
 - Size is power of 2, between 512 bytes and 16 Mbytes
- Divide logical memory into blocks of same size called **pages**
- Keep track of all free frames
- To run a program of size N pages, need to find up to N free frames and load program
- Set up a **page table** to translate logical to physical addresses
- Still have Internal fragmentation

Paging Model of Logical and Physical Memory

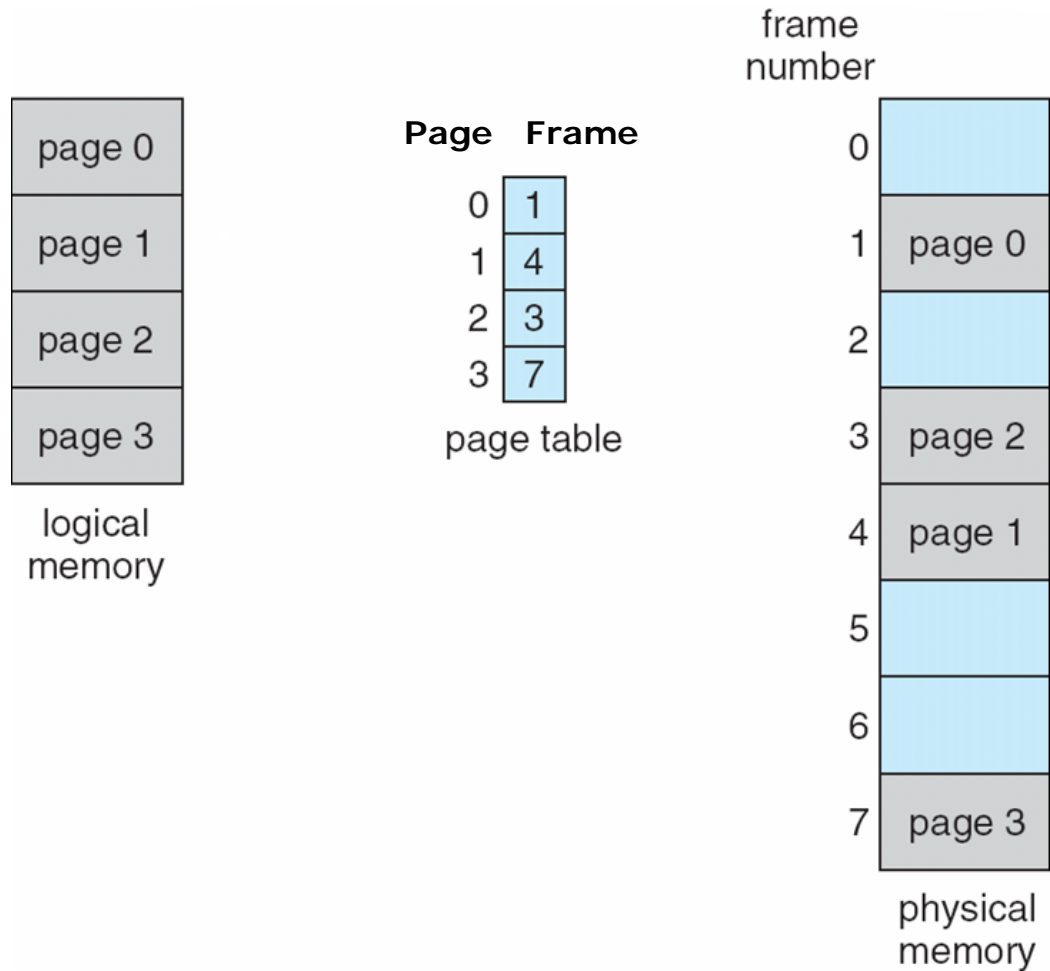


Address Translation Scheme

- Address generated by CPU is divided into:
 - **Page number (p)** – used as an **index** into a **page table**, which contains **base address** of each page in physical memory
 - **Page offset (d)** – combined with **base address** to define the physical memory address that is sent to the memory unit

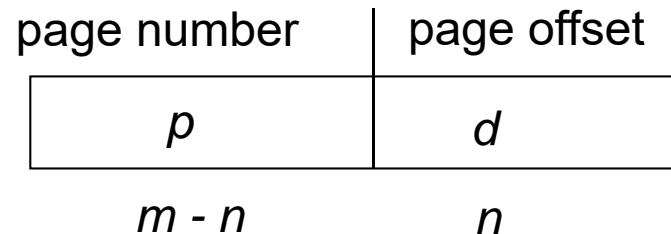

- ▶ For given logical address space 2^m and page size 2^n

Paging Hardware

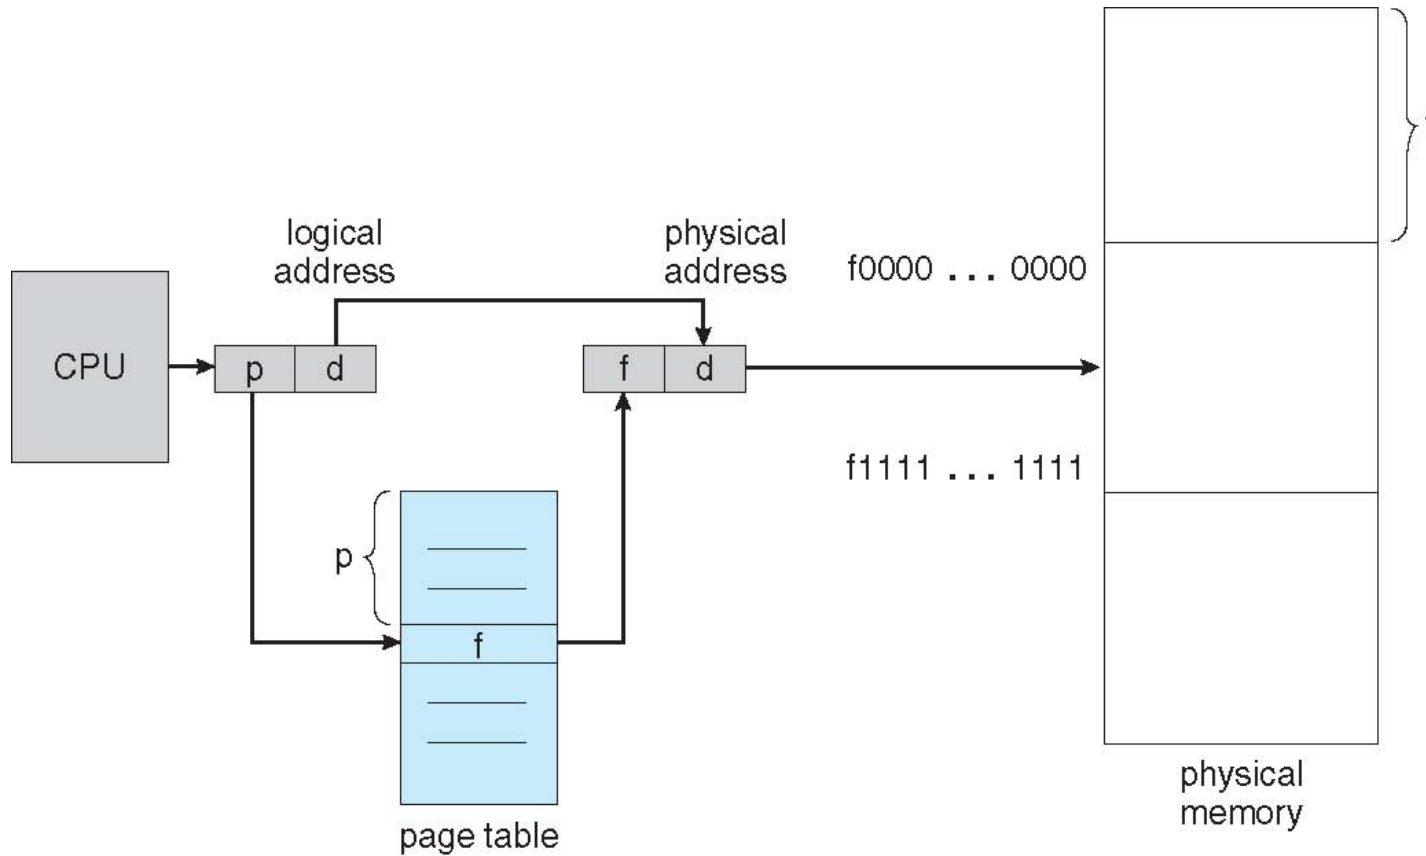


Paging Example

Page Frame

0	5
1	6
2	1
3	2

page table

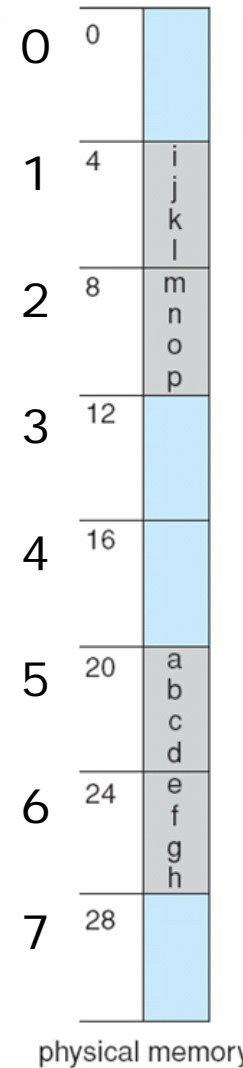

What character does the following logical addresses map to?

- (A) 10 = 10 10
- (B) 5 = 01 01
- (C) 14 = 11 10

$n=2$ and $m=4$ 32-byte memory and 4-byte pages

Paging (Cont.)

- Calculating internal fragmentation
 - Page size = 2,048 bytes
 - Process size = 72,766 bytes
 - 35 pages + 1,086 bytes
 - Internal fragmentation of $2,048 - 1,086 = 962$ bytes



- Internal fragmentation
 - Worst case fragmentation = frame size – 1 byte
 - On average fragmentation = $1 / 2$ frame size

- Calculate the page numbers and offsets for the following address, when page size is 1KB:
 - $2375 = 1024 * 2 + 327$
 - $19366 = 1024 * 18 + 934$

Free Frames

free-frame list

14
13
18
20
15

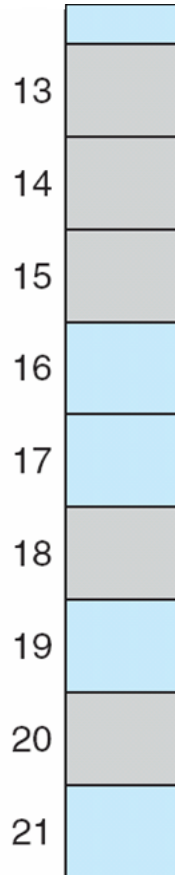


(a)

Before allocation


free-frame list

15



0	14
1	13
2	18
3	20

new-process page table

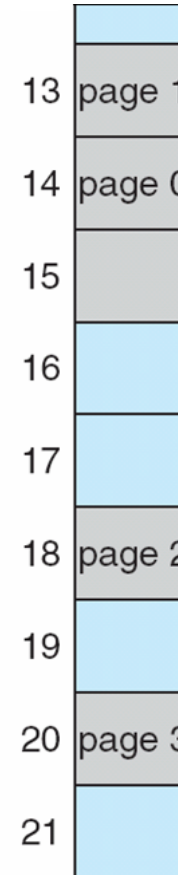


(b)

After allocation

Implementation of Page Table

- Page table is kept in main memory
 - **Page-table base register (PTBR)** points to the page table
 - **Page-table length register (PTLR)** indicates size of the page table
 - In this scheme every data/instruction access requires two memory accesses
 - ▶ One for the page table and one for the data / instruction
- The two memory access problem can be solved by the use of a special fast-lookup hardware cache called **associative memory** or **translation look-aside buffers (TLBs)**
 - TLBs typically small (64 to 1,024 entries)
 - On a TLB miss, value is loaded into the TLB for faster access next time
 - ▶ Replacement policies must be considered
 - ▶ Some entries can be **wired down** for permanent fast access

Paging Hardware With TLB

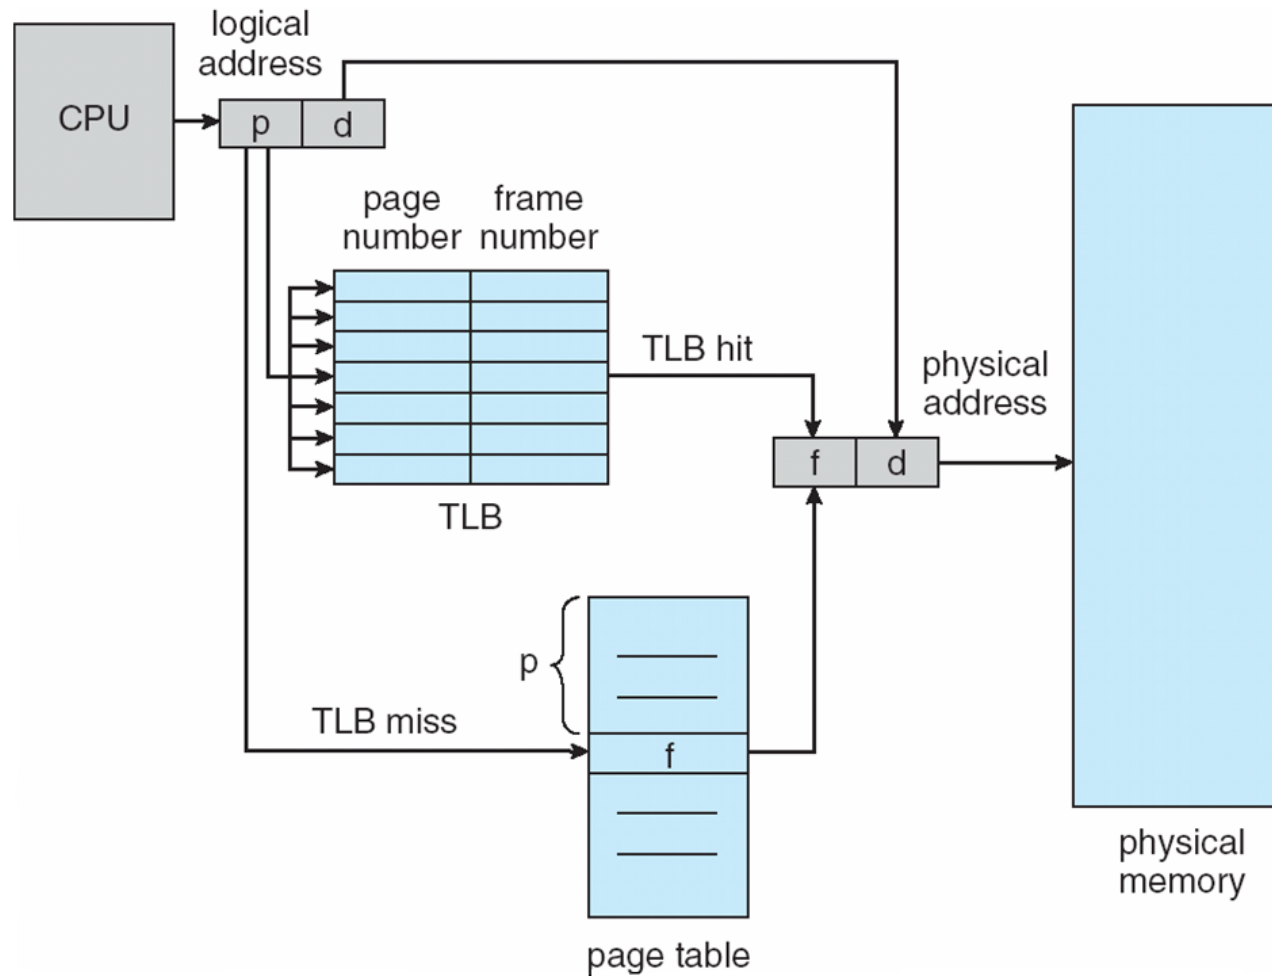

Effective Access Time

- Associative Lookup = ε time unit
- Hit ratio = α
 - Hit ratio – percentage of times that a page number is found in the associative registers; ratio related to number of associative registers
- Consider $\alpha = 80\%$
- **Effective Access Time (EAT)**

$$\begin{aligned} \text{EAT} &= (1 + \varepsilon) \alpha + (2 + \varepsilon)(1 - \alpha) \\ &= 2 + \varepsilon - \alpha \end{aligned}$$

- When $\alpha = 80\%$, $\varepsilon = 20\text{ns}$ for TLB search, 100ns for 1 memory access time unit
- $\text{EAT} = 120 \times 0.80 + 220 \times 0.20 = 140\text{ns}$

Structure of the Page Table


- Memory structures for paging can get huge using straight-forward methods
 - Consider a 32-bit logical address space as on modern computers
 - Page size of 4 KB (2^{12})
 - Page table would have 1 million entries ($2^{32} / 2^{12}$)
 - If each entry is 4 bytes -> 4 MB of physical address space / memory for page table alone
 - ▶ That amount of memory used to cost a lot
 - ▶ Don't want to allocate that contiguously in main memory

- Hierarchical Paging
- Hashed Page Tables
- Inverted Page Tables

Hierarchical Page Tables

- Break up the logical address space into multiple page tables
- A simple technique is a two-level page table
- We then page the page table

Two-Level Page-Table Scheme

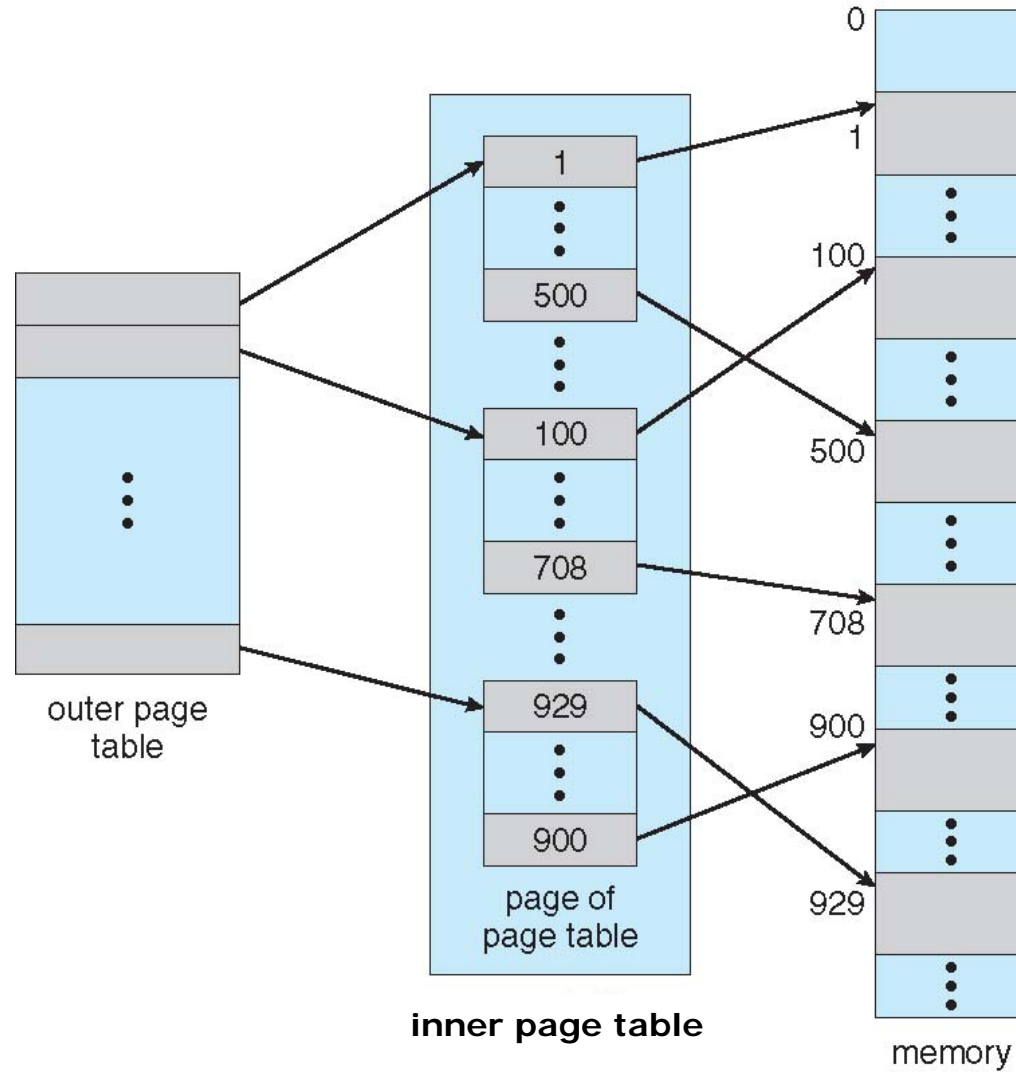


Two-Level Paging Example

- A logical address (on 32-bit machine with 4K page size) is divided into:
 - a page number consisting of 20 bits
 - a page offset consisting of 12 bits
- Since the page table is paged, the page number is further divided into:
 - a 10-bit page number
 - a 10-bit page offset
- Thus, a logical address is as follows:


page number		page offset
p_1	p_2	d
10	10	12

- where p_1 is an index into the outer page table, and p_2 is the offset within the page of the inner page table
- Known as **forward-mapped page table**

Address-Translation Scheme

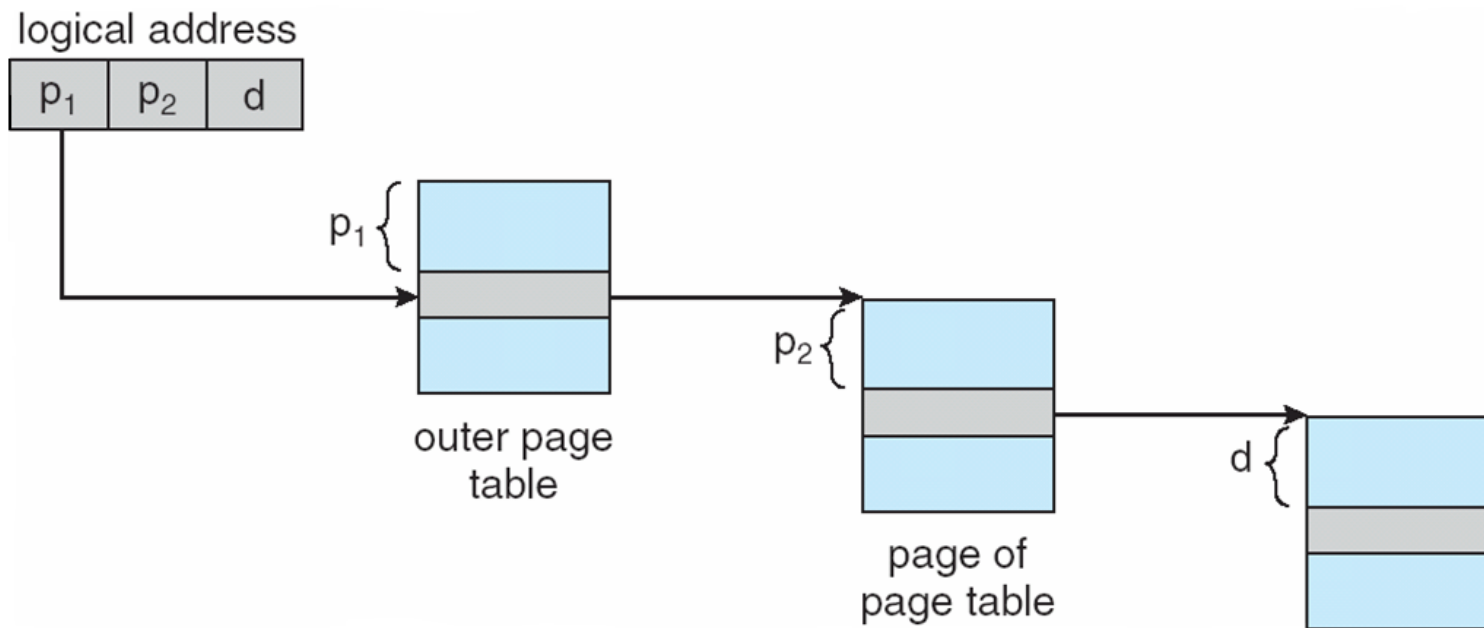


Three-level Paging Scheme

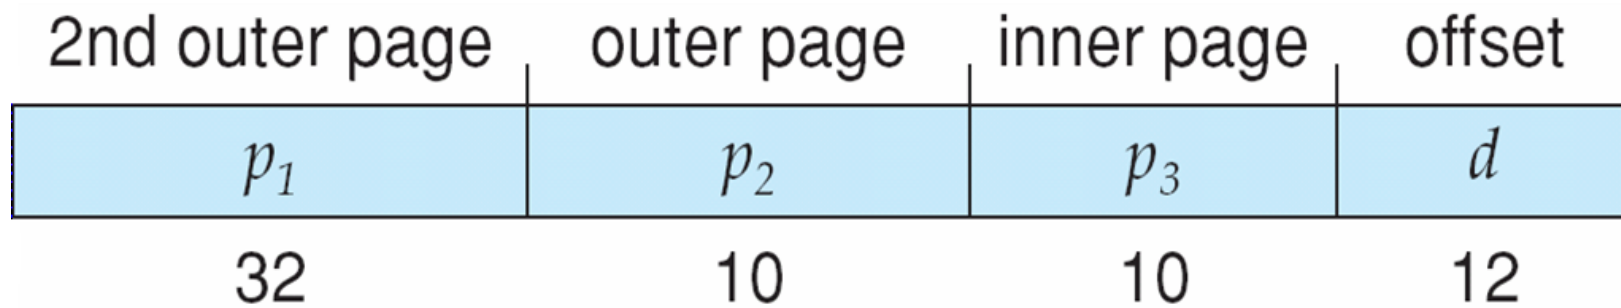

Hashed Page Tables

- Common in address spaces > 32 bits
- The virtual page number is hashed into a page table
 - This page table contains a chain of elements hashed to the same location
- Each element contains (1) the virtual page number (2) the address of the mapped page frame (3) a pointer to the next element
- Virtual page numbers are compared in this chain searching for a match
 - If a match is found, the corresponding physical frame is extracted


Hashed Page Table

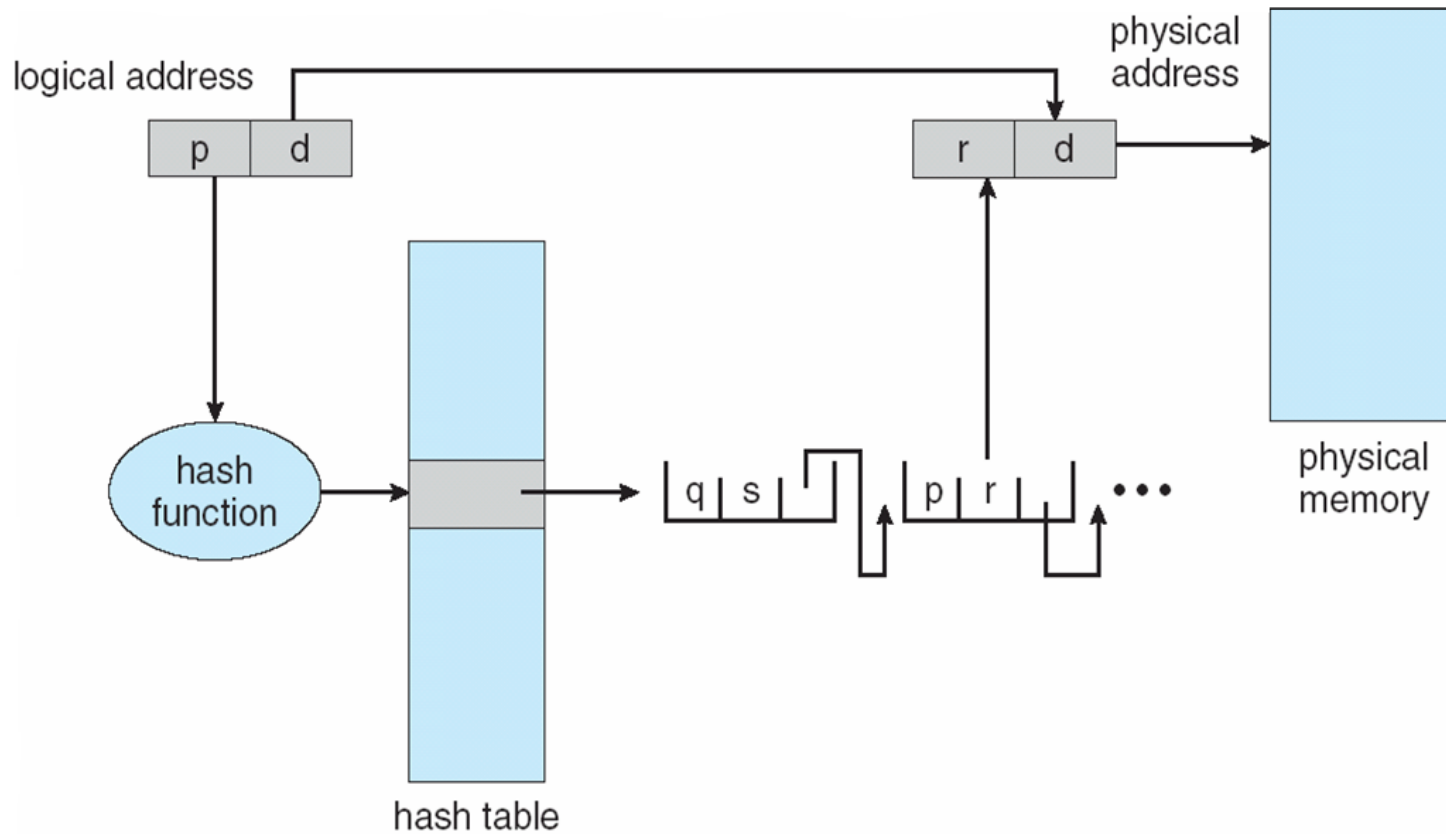

Inverted Page Table

- Rather than each process having a page table and keeping track of all possible logical pages, track all physical pages
- One entry for each real frame of memory
- Entry consists of the virtual address of the page stored in that real memory location, with information about the process that owns that page
- Decreases memory needed to store each page table, but increases time needed to search the table when a page reference occurs
- Use hash table to limit the search to one — or at most a few — page-table entries
 - TLB can accelerate access


Inverted Page Table Architecture

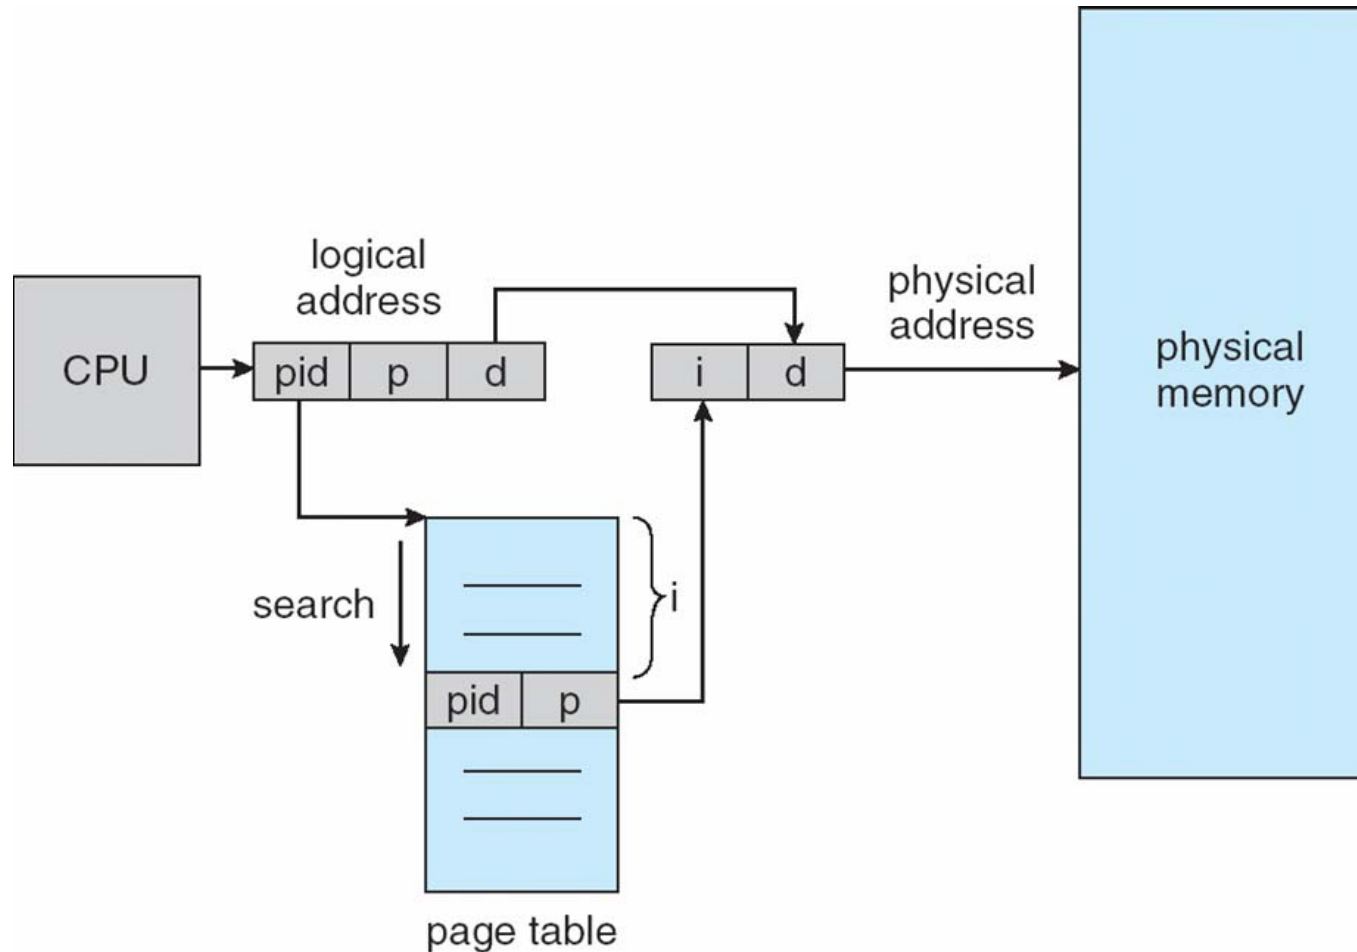


Segmentation

- Memory-management scheme that supports user view of memory
- A program is a collection of segments
 - A segment is a logical unit such as:
 - main program
 - procedure
 - function
 - method
 - object
 - local variables, global variables
 - common block
 - stack
 - symbol table
 - arrays

User's View of a Program

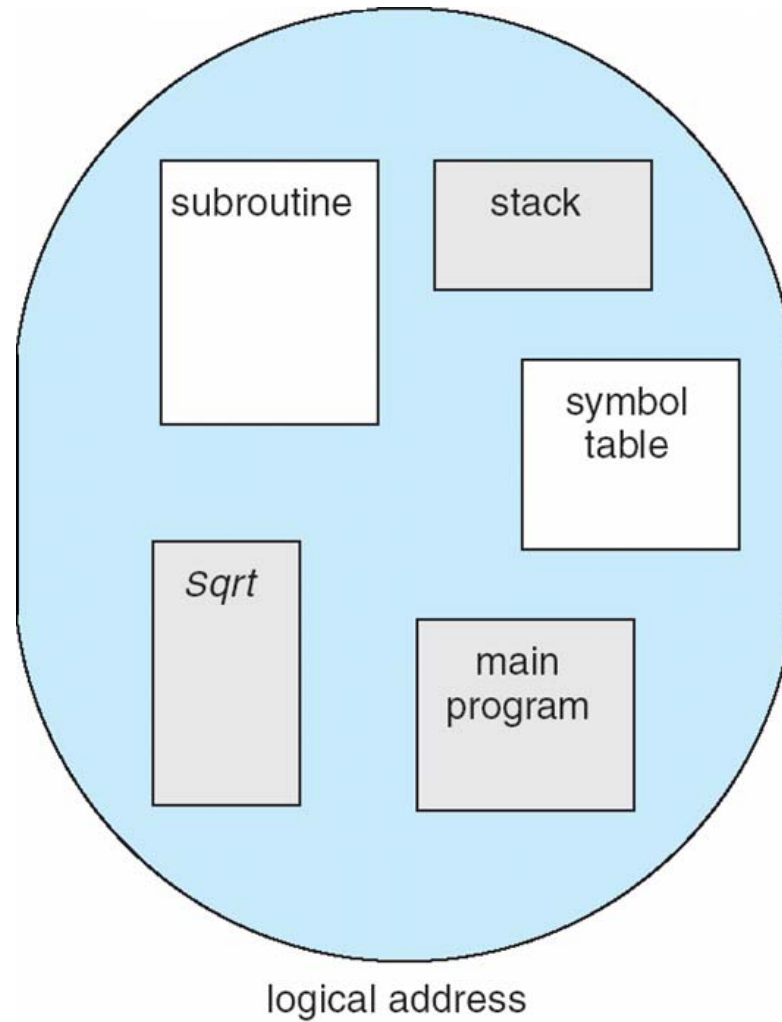


Example of Segmentation

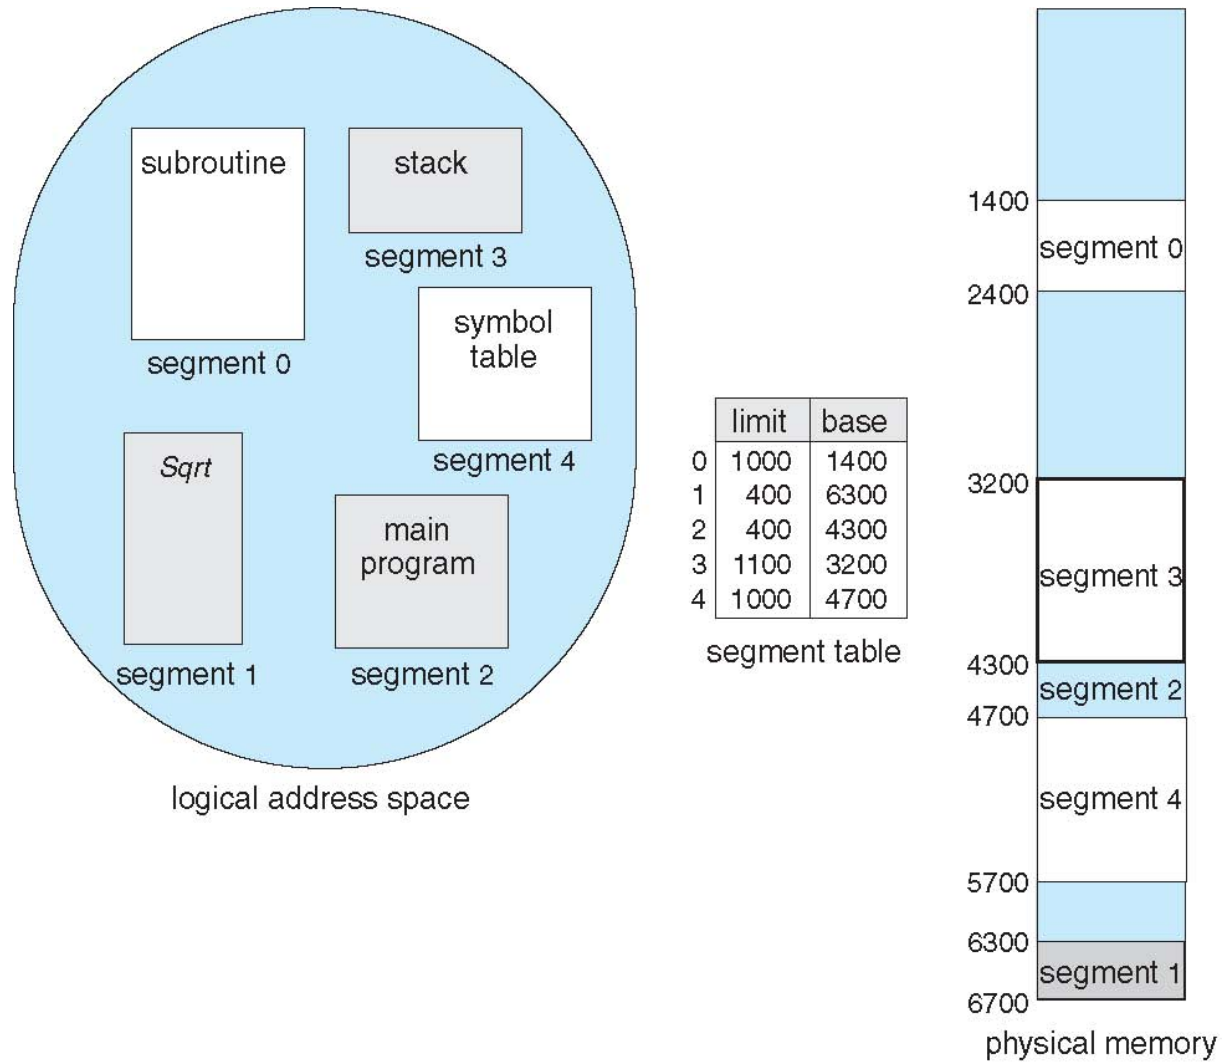

Segmentation Architecture

- Logical address consists of a two tuple:
 <segment-number, offset>,
- **Segment table** – maps two-dimensional physical addresses; each table entry has:
 - **base** – contains the starting physical address where the segments reside in memory
 - **limit** – specifies the length of the segment
- **Segment-table base register (STBR)** points to the segment table's location in memory
- **Segment-table length register (STLR)** indicates number of segments used by a program;
 segment number **s** is legal if **s** < **STLR**

Segmentation Hardware

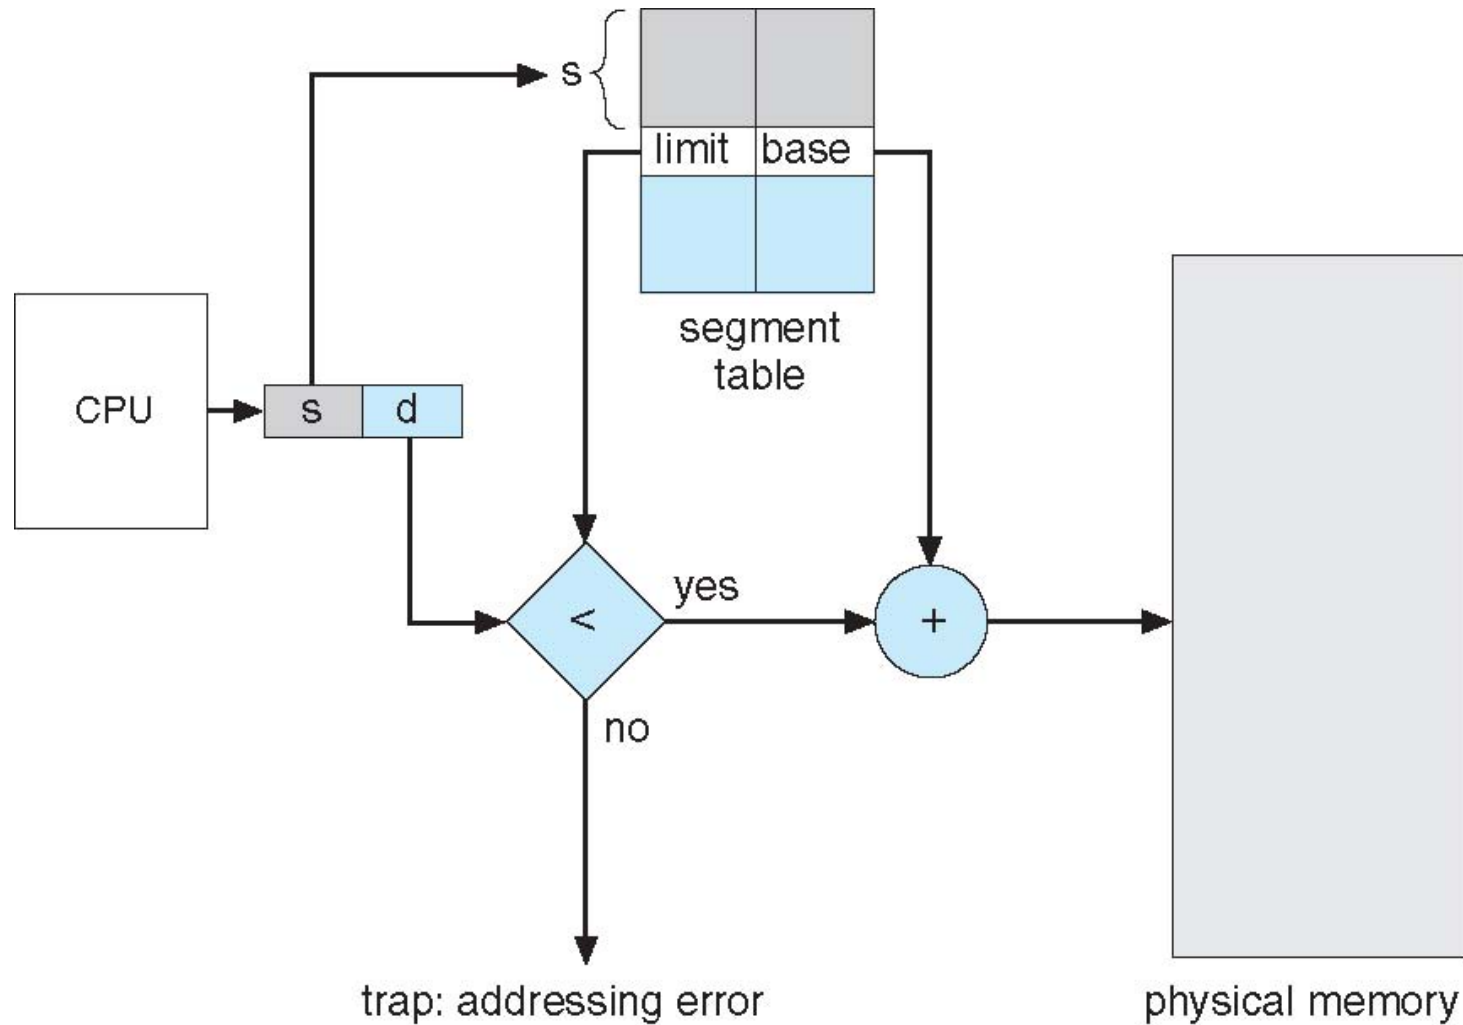

Pop-Quiz

- Consider a 32-bits logical address space
 - Two-level page table
 - 4K page size
 - 10-bit page number
 - 10-bit page offset
 - each entry is 4 bytes

page number		page offset
p_1	p_2	d
10	10	12

- Question: How much space is needed to store the page table?

Homework

- Reading
 - Chapter 8